

# Introduction to DMR

---

## Presented by N7MOT – Lenny Gemar

Amateur radio began with spark gap transmitters, evolving to Morse code and analog voice communications, all originally in the Low Frequency (LF) and High Frequency (HF) bands. Since those early days, many new modes, both analog and digital have been developed. These modes now span from the Very Low Frequencies (VLF) to the Extra High Frequencies (EHF).

This presentation is designed to acquaint amateur radio operators with the Digital Mobile Radio or **DMR** format of digital audio communications, used primarily in the VHF and UHF bands. We'll briefly discuss the other five Common Air Interface formats (CAI) before diving into the specifics of DMR.

# Introduction to DMR

---

## Digital Voice Modes used in Amateur Radio Interconnected Systems

- **Manufacturer-Specific Formats**
  - **D-Star** – Digital Smart Technologies for Amateur Radio (FDMA) - Icom
  - **Wires-X/System Fusion** - Wide-coverage Internet Repeater Enhancement System (FDMA) - Yaesu
  - **NXDN (IDAS/NEXEDGE)** – Icom/Kenwood Collaboration (FDMA)
- **Open Standards Formats**
  - **DMR** – Digital Mobile Radio (TDMA 2-TS)
  - **P25** (Phase 1) – Project 25 or APCO P25 (Phase 1 FDMA, Phase 2 TDMA 2-TS)
  - **TETRA** - Terrestrial Trunked Radio, formerly known as Trans-European Trunked Radio (TDMA 4-TS) No known U.S./Canada amateur deployments.

# Introduction to DMR

---

## Digital Voice Modes used in Amateur Radio Interconnected Systems.

Repeaters in service as reported by RepeaterBook.com on 11/13/2017 @ 17:00 PST for the U.S. and Canada.


# of Repeaters	System Type
1,241	DMR
1,140	D-Star
320	Wires-X/Fusion*
266	P25
95	NXDN

### \* Notes

- *There are over 1,500 System Fusion repeaters listed in Repeater Book. This table only counts the number of repeaters that are interconnected.*
- *As our focus is on U.S. and Canada, the TETRA European format is not included.*
- *As Repeater Book allows user self-maintenance, its accuracy is always suspect.*

# Introduction to DMR

## Analog versus Digital Signal Attenuation Over Distance

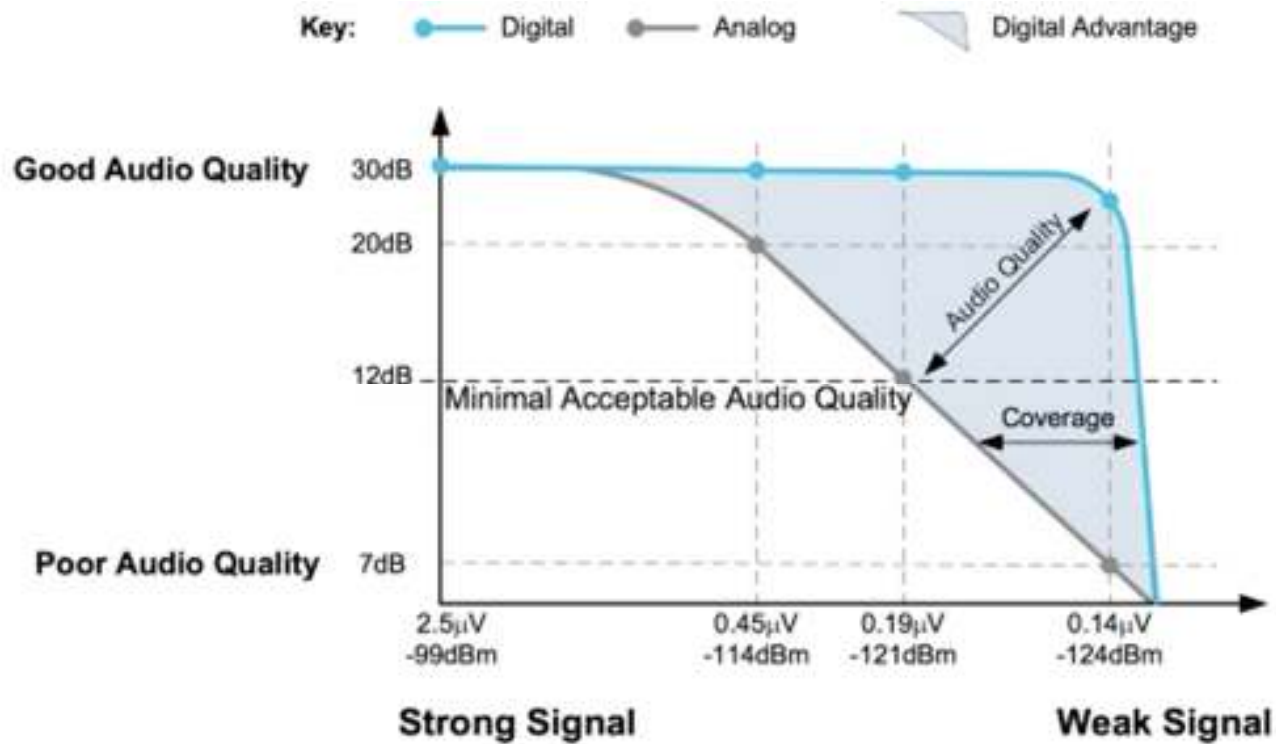

# Introduction to DMR

---

**FDMA** (Frequency Division Multiple Access) and **TDMA** (Time Division Multiple Access) technologies are used in P25 and in business and industrial digital radios (FDMA for P25 Phase I & NXDN™; TDMA for P25 Phase II & DMR).

The basic difference between **FDMA** and **TDMA** is the definition of a channel and how it is used.


In **FDMA**, a particular bandwidth (e.g. 12.5 kHz) at a particular frequency (e.g. 150.000 MHz) is used to define a channel.

This is the way channels have been allocated in analog land mobile radios (**LMR**) for decades. All information is contained in the channel – compressed to the smallest frequency footprint. Analog radio bandwidth has recently shrunk from 25 kHz to 12.5 kHz in the commercial radio bands, which is about the limit for analog technology without seriously degrading radio voice quality. With digital technology, channel bandwidth can be compressed to a spectrum-efficient 6.25 kHz by using vocoders and error correction.

# Introduction to DMR

---

The basic difference between **FDMA** and **TDMA** is the definition of an RF channel and how it is used. In **FDMA**, a particular bandwidth (e.g. 12.5 kHz) at a particular frequency (e.g. 150.000 MHz) is used to define an RF channel.

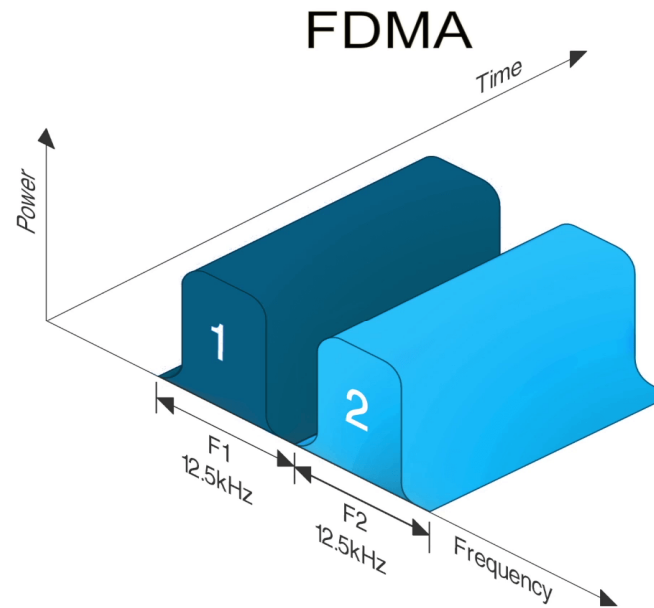

# Introduction to DMR


---

In regard to TDMA and digital technology, the 12.5 kHz RF channel bandwidth is maintained. The RF spectrum efficiency is achieved when two voice channels share time to create a 6.25 kHz equivalency. TDMA technology is possible only by using intelligent infrastructure to make and control the time slots.

## FDMA vs. TDMA



# Introduction to DMR

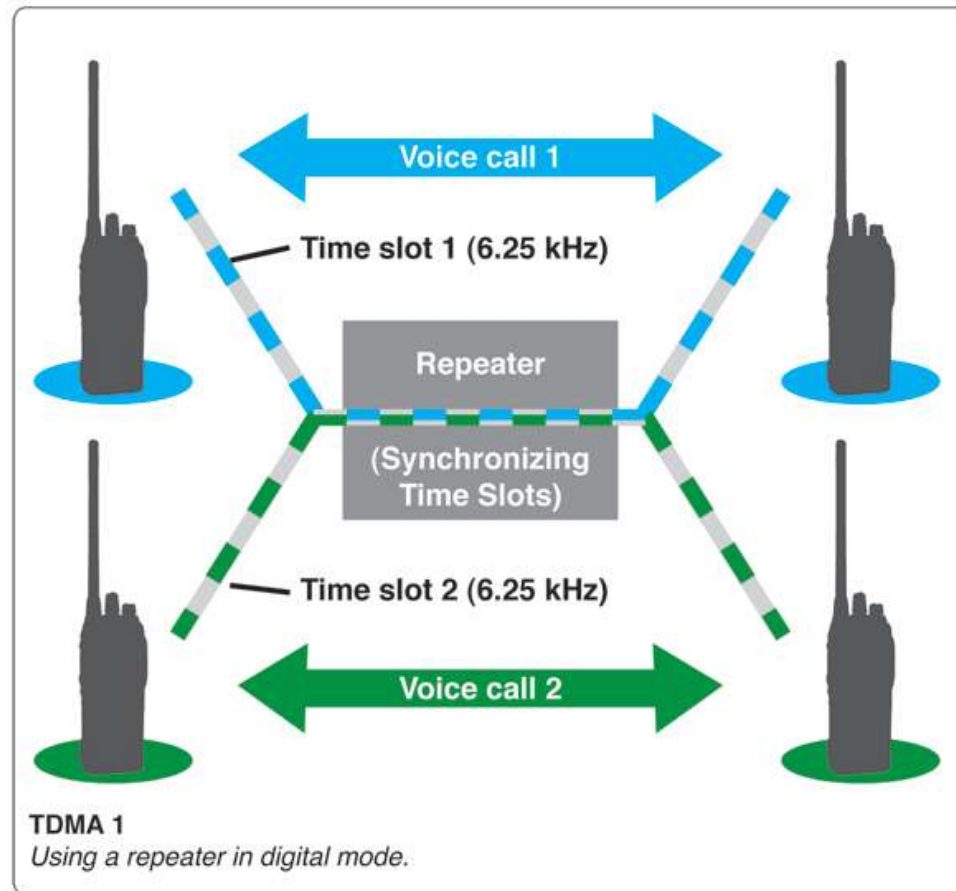



# Introduction to DMR

---

Digital **M**obile **R**adio (DMR) is an open digital mobile radio standard defined in the European Telecommunications Standards Institute (ETSI) Standard TS 102 361 parts 1–4 and used in commercial products around the world.

Tier II DMR occupies 12.5Khz of channel space and is a two "slot" TDMA-based system that uses an AMBE+2 vocoder. This same vocoder is used in Yaesu Fusion radios.

DMR, along with P25 phase II and NXDN are the main competing LMR technologies in achieving 6.25 kHz equivalent bandwidth using the proprietary AMBE+2 vocoder. DMR and P25 II both use two-slot TDMA in a 12.5 kHz channel, while NXDN uses discrete 6.25 kHz channels using Frequency Division (FDMA).

# Introduction to DMR

---

## DMR Definitions

- **Color Code** – A number that denotes a specific repeater when two or more repeaters have overlapping coverage areas. Normally “1”. This is somewhat like a repeater requiring PL.
- **Time Slot (TS)** – Any particular conversation will be on either TS1 or TS2. This is determined by the repeater owner/system operator. This allows two simultaneous conversations.
- **Talk Group (TG)** – A specific voice conduit or channel routed through the repeater and to the Internet. There are hundreds currently in use, based on geography or special interest.
- **Zone** – Think of these as banks of memory channels. Subscriber radios allow you to divide analog channels and digital TGs into groups for easier access. Most radios are limited to 16 channels/TGs per zone. In DMR, the terms “channels” and “TGs” are often used interchangeably.

# Introduction to DMR

---

## DMR Definitions cont.

- **Radio ID** – A unique decimal ID number allocated per user/radio and assigned by [DMR-MARC.net](http://DMR-MARC.net). Unlike D-Star, you cannot use your callsign as your Radio ID so you must vocally ID as on any other analog channel.
- **Code Plug** – This is a generic term for the programming in the radio. Originally, code plugs were actual memory modules or chips that were programmed external to the radio and then inserted. Today you can program a code plug without opening the radio, generally using your computer USB port and a cable to the radio's microphone jack or accessory connector. Most area DMR groups provide a repository of code plug files or images for your use.

# Introduction to DMR

---

## DMR Definitions cont.

- **TG Types** – A repeater owner has the ability to determine (through the system server) the priority and accessibility of TGs. There are two TG types: **Static** and **Dynamic**.
  - **Static** – A static TG is always enabled, available for use. If there is activity on that TG anywhere across the system, it will be transmitted out that repeater on its assigned TS. This type is also known as **Full-Time (FT)**.
  - **Dynamic** – Also known as **Part-Time (PT)**, it is only active if someone on the repeater has keyed up on that TG. These TGs will normally time-out, turning off after a defined period of no **local** activity. On some repeaters, they may also be commanded on/off with an MCT (Master Control Talk group).

# Introduction to DMR

---

## DMR Definitions cont.

- **Contacts** – Sometimes referred to as Digital Contacts or Contact List. This is the list of Talk Groups (TGs) and Individual Contacts. Any TG you wish to assign to a channel must be in this list. Any individual names and callsigns you wish to see displayed during a call must also be in this list. The current DMR-MARC database is in excess of 75,000 assigned radio user IDs. Only a few radios currently have the capability to hold the entire list.
- **Talker Alias (TA)** – A relatively new feature added to the ETSI DMR standard that eliminates the need for maintaining a contact directory in your radio. The specification allows your radio information to be sent as part of the communication packets for display on receiving radios. Currently only available on Hytera radios, hacked versions of TYT MD-380s, and the Brandmeister network. Expect this to become more prevalent as manufacturers update their equipment.

# Introduction to DMR

---

## DMR Subscriber Radios

As DMR is an international ETSI standard, there are a host of manufacturers providing subscriber radio equipment, both **portables** and **mobiles**. The most abundant radios on our DMR networks are manufactured by **Tytera**, **Hytera**, **Connect Systems (BFDX)**, and **Motorola**. Other manufacturers include Kenwood, RCA, and Vertex Standard, though it may be more difficult finding pre-made codeplugs for these latter manufacturers.

**IMPORTANT NOTE** - Due to the complexity in configuring DMR radios, Front Panel Programming (**FPP**) is generally not available, unlike analog VHF and UHF ham radios. Don't let this scare you away, however. Just treat this as if the radio could only operate from memory channels rather than rotating a frequency dial. You've probably grown used to programming your radio using Chirp, so this won't be much different.

# Introduction to DMR

## DMR Tier II Subscriber Radios - Portables



**Tytera  
MD380**  
~\$100



**Tytera  
MD2017  
Dual-Band**  
~\$220



**CSI  
CS-580**  
~\$130



**Hytera  
PD-782**  
~\$720



**Motorola  
XPR-7550**  
~\$700+

# Introduction to DMR

---

## DMR Tier II Subscriber Radios - Mobiles



**CSI  
CS-800  
Single Band  
~\$280**



**Hytera  
MD782  
Single Band  
~\$740**



**Motorola  
XPR-7550  
Single Band  
~\$600+**




# Introduction to DMR

---

## Hot Spots, or when you aren't in range of a repeater.

A hot spot allows you to access DMR TGs that either may not be available on your local repeater, or when you are not in range of any repeaters.


New products and methods are invented nearly daily, so I'll only touch on the MMDVM and RF Shark Open Spot, which are just two of the most popular methods.

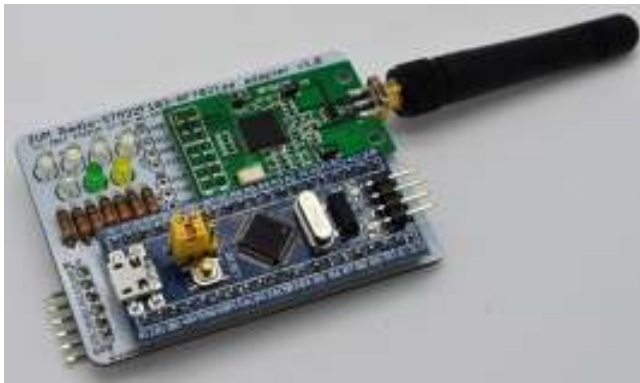

# Introduction to DMR

---

## Now What? Steps to Getting Started.

1. Purchase a radio. Be sure it is a Tier II compatible radio.
2. Procure your radio ID from **DMR-MARC.net**. It's free, but may take a day or two to get to you. You only need one per person, not one per radio.
3. While waiting for your radio to arrive, read all you can about DMR.
4. Program your radio. The "East Side" repeaters are included in code plugs available at <http://www.pnwdigital.net/> 
5. Listen to the PNW "Not-A-Net Gathering" Wednesdays @ 19:00 Pacific Time on TG PNW 2 (PNWR 2 if on a Brandmeister hot spot connection.) This gathering is an opportunity to ask questions and expand your technical knowledge on DMR.
6. Enjoy the DMR system.

# Introduction to DMR

Moses Lakes/Ellensburg Repeater Talkgroup Matrix					
Talkgroup	TG ID	TS	MosesLakeEllensburg	Coeur d'Alene	Spokane
Local 1	3181	1	F/5	F/5 link	F/5 link
Local 2	3166	2	F/5	F/5	F/5
Parrot 1	9998	1	P2/0	P2/0	P2/0
PNW 1	3187	1	F/3m	F/m	F/3
PNW 2	103187	2	F/3m	F/m	F/3
PNWR 2 (bm)	31771	2		P15/m	P15/m
TAC 1	8951	2	P5/m	P5/m	P15/3
TAC 310 (bm)	310	2	P5/m	P5/m	P15/3
TAC 319	319	2	P5/m	P5/m	
Washington 1 (bm)	3153	1	F/3m	F/3	F/3
Washington 2	103153	2	F/3m	F/3	F/3
Data / Private Call			Y/No	Y/No	Y/No
MCT Enabled			No	Yes	No

# Introduction to DMR

---

## Operation and Etiquette

- Pausing for system setup, break-in traffic, and repeater ID (BSI)
- Initiating and answering a call
- Changing Zones
- Netwatch – An informational diagnostic tool
- Accessing the DMR network via a “hot spot”
- Touring the PNW web site: <http://www.pnwdigital.net/>

# Introduction to DMR

---

## References

There's a lot to learn and it can be daunting at first. Since we are in the Pacific Northwest, your best, first resource is the PNW web site at <http://www.pnwdigital.net/>. TG matrixes, TG usage guidelines, and sample code plugs are all readily available. Feel free to click around in the web site and learn all you can. You can't break it and I highly recommend bookmarking it.

Presentations by other DMR-supportive groups are on that web site as well, so you can learn more detailed information that couldn't be covered this evening. One particularly good presentation for new users is [http://www.n4hsv.net/assets/digital-mobile-radio-\(dmr\)-intro.pdf](http://www.n4hsv.net/assets/digital-mobile-radio-(dmr)-intro.pdf). Just be aware that this one has some region-specific information not pertinent to the Pacific Northwest.

In addition to the PNW network, there are other DMR networks, the largest being Brandmeister. It is less controlled and will likely be what you connect through if you purchase a hot spot.